



# MINIKA

## 90°

LR9014.515-90

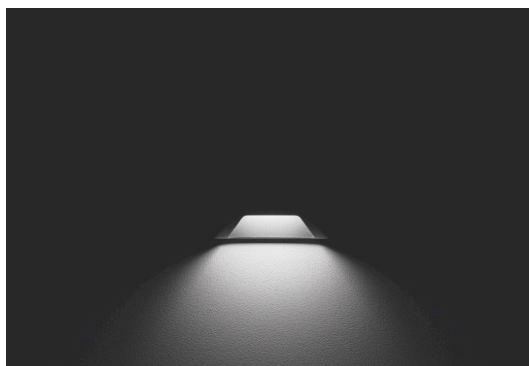

# MINIKA

## 90°

### LR9014.515-90

#### GENERAL HIGHLIGHTS


- Operating temperature: -40°C / +55°C
- Easy installation with in - ground housing and IP rated connectors
- In compliance with EN 60598, EN 62722

#### ELECTRICAL PROPERTIES

- Drive current: 350mA
- Excellent thermal management with optimized PCB design
- Energy class: A
- Input Voltage: 220V - 240V
- Control type: On/Off, 1-10V (optional)
- Power factor > 0.95

#### OPTICAL PROPERTIES

- Structured with LED light source
- MacAdam Elipse 3
- Suitable for accent lighting applications
- Lumen output (absolute photometry): 5lm - 11lm
- Color temperature: 3000K, 4000K, 2700K (optional)
- CRI > 70 (4000K), CRI > 80 (3000K)



#### BODY HOUSING & FINISH

- Corrosion resistant aluminum housing
- Ingress protection: IP67
- Impact protection: IK08
- Weight: 0,9 kg
- Dimensions: 7cmx15cmx7cm

#### Finish Options

- HM1 –Special Black
- HM2 –Special Silvery Grey
- HM3 –Special Dark Grey
- HM4 –Special Light Grey
- HM5 –Special White
- Optional RAL codes

LUMINAIRE				
CODE	DESCRIPTION	POWER (350 mA)	LUMEN	COLOR TEMPERATURE
LR9014.515-90	Minika 90°	2.5W	5lm	3000K
LR9014.515-90	Minika 90°	2.5W	6lm	4000K