


# MINIKA

SIMPLE, SMALL AND FUN!



Minika is a great choice for accent lighting applications within exterior spaces.



# MINIKA

## TECHNICAL SPECIFICATIONS

### GENERAL HIGHLIGHTS

- Operating temperature: -40°C / +55°C
- Easy installation with in - ground housing and IP rated connectors
- In compliance with EN 60598, EN 62722

### ELECTRICAL PROPERTIES






- Drive current: 350mA
- Excellent thermal management with optimized PCB design
- Energy class: A
- Input Voltage: 220V - 240V
- Control type: On/Off, 1-10V (optional)
- Power factor > 0.95

### OPTICAL PROPERTIES

- Structured with LED light source
- MacAdam Elipse 3
- Suitable for accent lighting applications
- Lumen output (absolute photometry): 5lm - 11lm
- Color temperature: 3000K, 4000K, 2700K (optional)
- CRI > 70 (4000K), CRI > 80 (3000K)

### BODY HOUSING & FINISH

- Corrosion resistant aluminum housing
- Ingress protection: IP67
- Impact protection: IK08

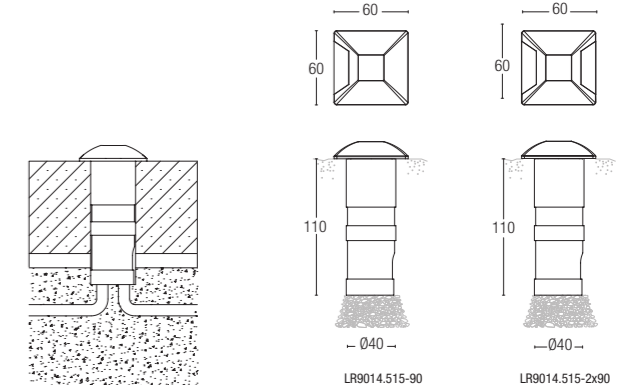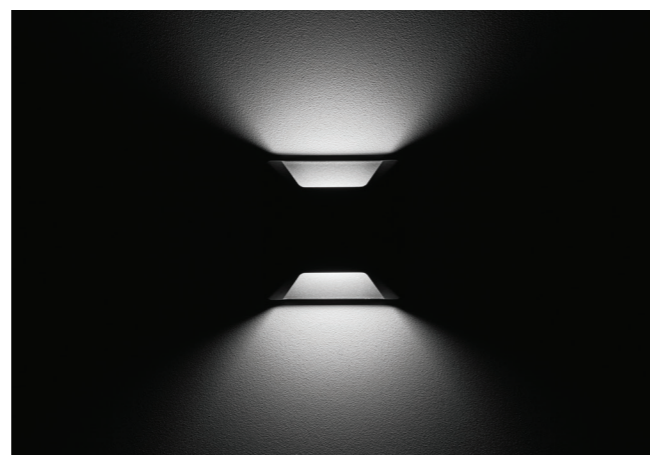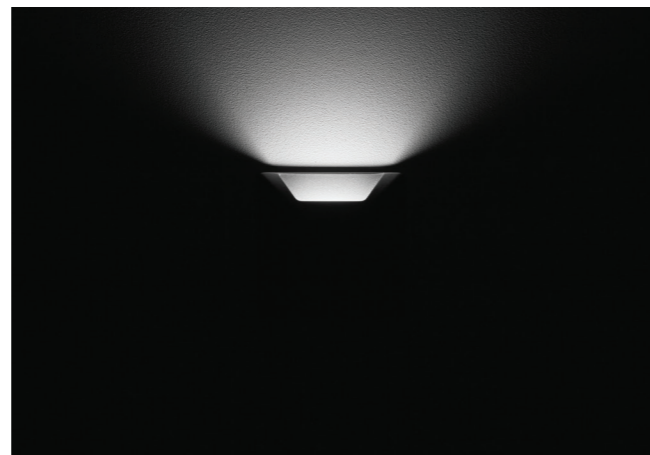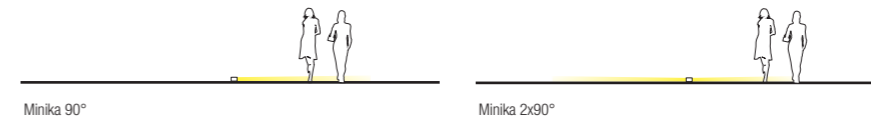

LUMINAIRE				
CODE	DESCRIPTION	POWER (350 mA)	LUMEN	COLOR TEMPERATURE
LR9014.515-90	Minika 90°	2.5W	5lm - 6lm	3000K / 4000K
LR9014.515-2x90	Minika 2x90°	2.5W	10lm - 11lm	3000K / 4000K